
YS MK

# YS 2951 W MK

Product page https://www.speck-pumps.com/en/p/ys-2951-w-mk-p50975

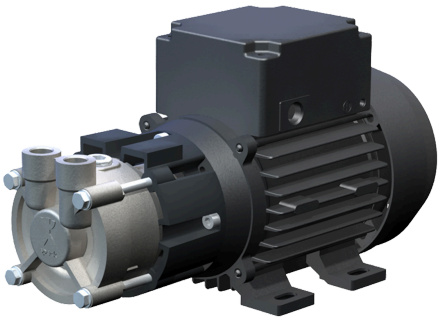

## Description

Self-priming peripheral impeller pumps with magnetic coupling are characterized by high pressure at low flow rates and a compact design. Thanks to the magnetic coupling, they are leak-free and maintenance-free.

## Sales text

YS 2951 W MK

## Areas of use

> Cooling circuits: Our pumps ensure reliable cooling in a variety of applications. > Temperature controls: They ensure precise and efficient temperature control.

## Technical data

### Hydraulic power

| | |
|---|---|
| Förderhöhe | 30 mWS |
| Operating pressure max. | 30 mWS |

### Motor & drive

| | |
|---|---|
| Drehzahl | 2,800 min-1 |
| Degree of protection | IP 54 |

### Electrics

| | |
|---|---|
| Input voltage | 230 V |
| Frequency | 50 Hz |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | G 1/4" |
| Connection, discharge side | G 1/4" |

### Operating conditions & water

| | |
|---|---|
| Umgebungstemperatur | 40 ° C |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84137035 |