
BADU 21-41

# BADU 21-41/68H G

Article number 2341680337

Product page https://www.speck-pumps.com/en/p/badu-21-41-68h-g-2341680337

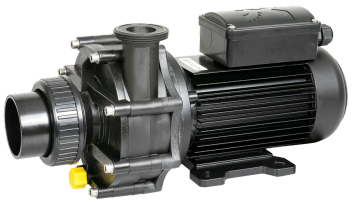

## Description

Connection variant of the universal circulation pump BADU 21-40/6. For tubs and pools, countercurrent systems, and pool cleaning devices.

## Areas of use

As a jet pump for bathtubs and counter-current systems, whirlpools, massage devices, air conditioning systems and cleaning devices up to 30 m³/h flow rate.

## Version

Close-coupled pump with bellows mechanical seal, mounted on a plastic impeller hub. The motor or pump shaft does not come into contact with the circulating water. Electrically isolated. The discharge port can be rotated 90° in increments. Can also be used vertically with the pump at the bottom. Self-draining when installed vertically.

## Material short text

BADU 21-41/68H G, 3~, 1,50 kW

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 24 m³/h |
| Förderhöhe | 0 – 22 mWS |
| Operating pressure max. | 2.5 bar |

### Motor & drive

| | |
|---|---|
| Drehzahl | 2,850 min-1 |
| Motor phases | 3~ |
| Degree of protection | IP 55 |
| Insulation class | F |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 1.9 kW |
| Power output $P_2$ (max.) | 1.5 kW |
| Voltage (max.) | 3~ 400/230 V |
| Frequency | 50 Hz |

### Filtration

| | |
|---|---|
| Lint catcher capacity | 0 l |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | 63 G |
| Connection, discharge side | 2 G |
| Recommended suction line diameter | 75 mm |
| Recommended discharge line diameter | 75 mm |

### Operating conditions & water

| | |
|---|---|
| Umgebungstemperatur | 40 ° C |
| Total salt concentration | 5 g/l |

## Dimensions & logistics

| | |
|---|---|
| Product length | 394 mm |
| Product width | 0 mm |
| Product height | 0 mm |
| Net weight | 13.9 kg |
| Customs tariff number | 84137051 |