
BADU JET TURBO

# BADU JET Turbo Design 1 Standard-Montagesatz

Article number 2328100000
Product page https://www.speck-pumps.com/en/p/badu-jet-turbo-design-1-standard-montagesatz-2328100000

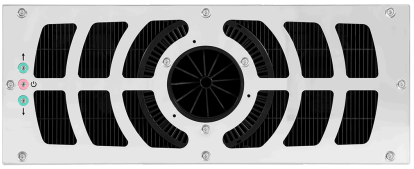

## Description

Innovative technology combined with elegant design. Perfect for recreational and leisure swimmers.

## Areas of use

For wall installation in all pool designs up to 7 mm thick, except round pools. For performance-oriented workouts, relaxation, rehabilitation training, fitness, or leisure fun with the whole family. For an endless swimming experience without turning.

## Version

A flush-mounted housing uses innovative propeller technology to draw water through the cover and return it to the pool in a powerful jet. The system is powered by an efficient, fanless, fully encapsulated permanent magnet motor. Power control and switching on and off are controlled via the integrated piezo buttons or a remote control.

## Material short text

BJ Turbo, Stand.-Montagesatz Design 1

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 125 – 245 m³/h |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 1.2 kW |
| Power output $P_2$ (max.) | 0 kW |
| Voltage (max.) | 1~ 200-240 V |

### General / Product features

| | |
|---|---|
| Product range | BADU Premium |

### Connections & piping

| | |
|---|---|
| Recommended suction line diameter | 0 mm |
| Recommended discharge line diameter | 0 mm |

### Nozzles & counter-current system

| | |
|---|---|
| Number of nozzles | 1 St |
| Nozzle swivels in all directions | 5 ° |
| Outlet pressure at the nozzle | 0 bar |
| Outlet velocity, centred 2 m in front of the nozzle | 3 m/s |
| Massage pressure max. | 0 bar |

### Operating conditions & water

| | |
|---|---|
| Umgebungstemperatur | 0 ° C |
| Total salt concentration | 0 % |

## Dimensions & logistics

| | |
|---|---|
| Customs tariff number | 84798997 |