
BADU PROFI-MK

# BADU Profi-MK 34

| | |
|---|---|
| Article number | 2102380238 |
| GTIN/EAN | 4260673451165 |
| Product page | https://www.speck-pumps.com/en/p/badu-profi-mk-34-2102380238 |

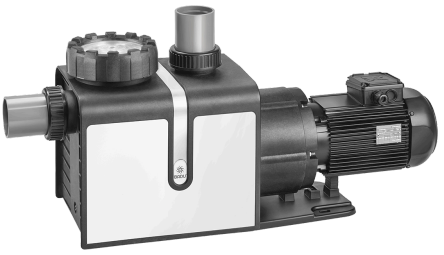

## Description

Dichtungslose Pumpe für den Pool. Einzigartif, zuverlässg und kompromisslos.

## Areas of use

Schwimmbadwasser-Umwälzung in Filteranlagen, aufstellbar jeweils max. 1,5 m oberhalb oder 3 m unterhalb des Wasserniveaus.

## Version

Blockpumpe mit integriertem Fasernfänger. Motor- bzw. Pumpenwelle kommt mit dem im Kreislauf befindlichen Wasser nicht in Berührung. Elektrische Trennung.
Fasernfängerinhalt ca. 4 l
Saugsiebmaschenweite ca. 3,2 x 2,6 mm

Auch für Chemieanwendungen mit anderen Werkstoffkombinationen lieferbar.

## Material short text

BADU Profi-MK 34, 1~, 1,80 kW

## Technical data

### Hydraulic power

| | |
|---|---|
| Flow rate | 50 m³/h |
| Förderhöhe | 18.6 mWS |

### Motor & drive

| | |
|---|---|
| Drehzahl | 2,840 min-1 |
| Motor phases | 1~ |
| Degree of protection | IP 55 |
| Insulation class | F |

### Electrics

| | |
|---|---|
| Power input $P_1$ (max.) | 2.31 kW |
| Power output $P_2$ (max.) | 1.8 kW |
| Voltage (max.) | 1~ 230 V |
| Frequency | 50 Hz |

### General / Product features

| | |
|---|---|
| Certification | TÜV, Patent |

### Filtration

| | |
|---|---|
| Lint catcher capacity | 4 l |

### Connections & piping

| | |
|---|---|
| Connection, inlet / suction side | 75 mm |
| Connection, discharge side | 75 mm |
| Recommended suction line diameter | 90 mm |
| Recommended discharge line diameter | 90 mm |

### Operating conditions & water

| | |
|---|---|
| Umgebungstemperatur | 40 ° C |
| Total salt concentration | 5 g/l |

## Dimensions & logistics

| | |
|---|---|
| Product length | 824 mm |
| Net weight | 31.5 kg |
| Customs tariff number | 84137051 |